



Clamp Hub

Industrial Couplings



Manufacture



我们正在为做流体技术行业典范而努力。
We are becoming the modle of Fluid Technclogy.



Luxe-group
璐克斯集团


锤击由任与卡兰 Clamp hub

Clamp hub



1. Steel material meeting ASTM and/or AISI standards.
2. Range from 1" to 8" with cold working pressures from 500 to 15,000 PSI.
3. Color coded for quick identification.
4. Fully interchangeable with most major brands of Hammer Unions.
5. Rigorous inspection checks throughout manufacturing.
6. BSP or NPT thread unions can be supplied upon request.

1. 材质符合ASTM和AISI标准;
2. 尺寸范围为1"~8" ;
3. 额定工作压力500PSI~15000PSI;
4. 唯一的彩色标识以便于快速识别;
5. 具有与标准锤击由任互换性;
6. 严格的生产过程管控;
7. 能够按客户要求提供NPT/BSP螺纹

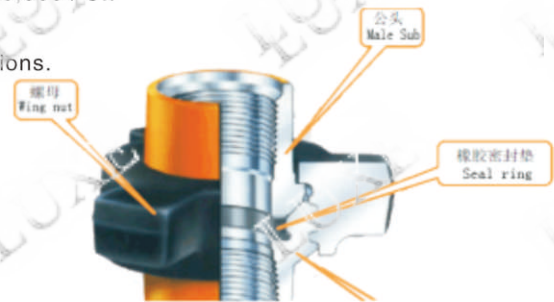

Thread union



Blind union



Butt weld union



Blanking cap





Clamp hub

Clamp hub

Standard
Materials

Carbon steel

Name	Size	Code	Weight	Price	Material
DN50	2"	L9001186			cs
DN80	3"	L9001187			cs
DN100	4"	L9001188			cs
DN125	5"	L9001197			cs
DN150	6"	L9001189			cs



我们正在为做流体技术行业典范而努力。
We are becoming the modle of Fluid Technclogy.



Hammer unions/Clamp hub availability referbce chart

NO. 产品	Color 颜色	Connection 连接端		Pressure Rating 压力		Sizes 尺寸								
		Female 母头	Male 公头	Cold working	Test	1"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"
Fig.100		SUB×NPT	SUB×NPT	1,000	1,500			✓	✓	✓	✓	✓	✓	✓
		BW SUB	Blind	1,000	1,500					✓	✓	✓	✓	
		SUB×NPT	Blind	1,000	1,500					✓	✓	✓	✓	
		SUB×NPT	Dust Cap	1,000	1,500					✓	✓	✓		
Fig.200		SUB×NPT	SUB×NPT	2,000	3,000	✓	✓	✓	✓	✓	✓	✓	✓	✓
		BW SUB	BW SUB	2,000	3,000							✓		
		Blind	BW SUB	2,000	3,000				✓	✓	✓	✓	✓	
		SUB×NPT	Dust Cap	2,000	3,000				✓					
Fig.206		SUB×NPT	SUB×NPT	2,000	3,000	✓	✓	✓	✓	✓	✓	✓	✓	✓
		SUB×NPT	Blind	2,000	3,000		✓							
		Dust Cap	SUB×NPT	2,000	3,000		✓				✓			
		BW SUB	BW SUB	2,000	3,000						✓			
		BW SUB	Blind	2,000	3,000						✓			
Fig.207		BW SUB	Blanking union	2,000	3,000						✓			
Fig.602		SUB×NPT	SUB×NPT	6,000	9,000	✓	✓	✓		✓	✓			
		BW SUB	BW SUB	6,000	9,000									
		BW SUB	Blind	6,000	9,000			✓		✓	✓			
Fig.1002		SUB×NPT	SUB×NPT	10,000	1,500			✓		✓	✓			
		BW SUB	BW SUB	10,000	1,500			✓		✓	✓	✓	✓	
Fig.1502		SUB×NPT	SUB×NPT	15,000	22,500	✓	✓	✓		✓				
		BW SUB	BW SUB	15,000	22,500	✓	✓	✓		✓	✓	✓	✓	
Clamp Hub		BW×BW						✓		✓	✓	✓	✓	

Clamp hub